

NW 607

EASY

EcoX

Scotsman
Ice Systems

Modular Ice Machine up to 280 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 607
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 607
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 607
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled

RECOMMENDED BINS

| Head | Bins | | kg |
|--------|------------|--------------|-----|
| NW 607 | ✓ | SB393 | 181 |
| | ✓ | SB530 | 243 |
| | CBT48EAMCD | SB948 | 406 |

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10°C | 43°C |
| Water temperature | 5°C | 38°C |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 280 kg



NW 607





Modular Ice Machine up to 280 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Modular Ice Machine up to 280 kg

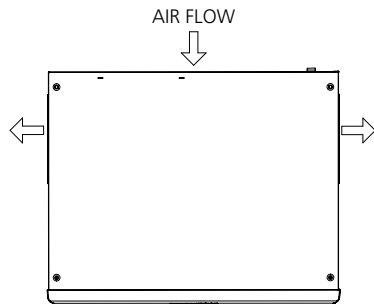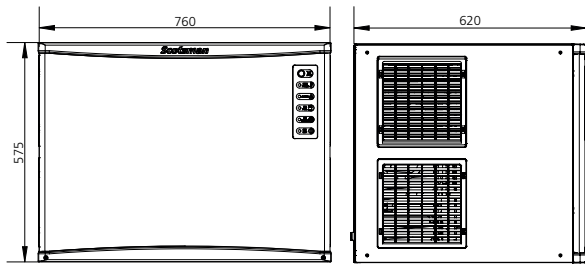

UNIT OF MEASUREMENT: mm

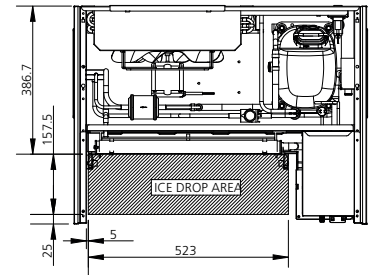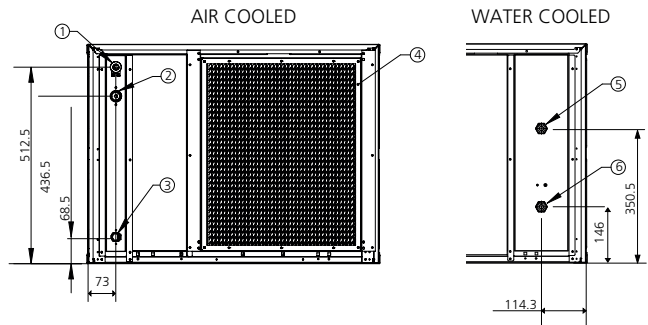

UNIT OF MEASUREMENT: mm

- 1. CORD SET
- 2. 3/4" GAS WATER INLET
- 3. 13/16" OD - WATER OUTLET
- 4. AIR INLET / AIR FILTER
- 5. 3/4" GAS-WATER OUTLET
- 6. 3/4" GAS-WATER INLET
WATER COOLED UNIT ONLY

| UNIT DATA | Compressor | | | | Circuit wires | | Max. fuse size | |
|--------------------|--------------------|-------------|----------|------|---------------|------------------|----------------|----|
| | Version | Voltage | Btu/h | W | No. | Ømm ² | A | |
| Size (W x D x H) | 760 x 620 x 575 mm | NW 607 AS | 230/50/1 | 9682 | 2839 | 3 | 1.5 | 16 |
| Net weight | 76 kg | NW H 607 AS | 230/50/1 | 9682 | 2839 | 3 | 1.5 | 16 |
| | | NW L 607 AS | 230/50/1 | 9682 | 2839 | 3 | 1.5 | 16 |
| SHIPPING DATA | | | | | | | | |
| Carton (W x D x H) | 830 x 690 x 740 mm | | | | | | | |
| Weight | 89 kg | | | | | | | |

| Version | Condensation | Voltage | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption* | | Water usage* | Instant power |
|-------------|--------------|----------|----------------------------------------------|-----------|-----------|---------------------|---------|--------------|---------------|
| | | | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/100 kg | kWh/24h | l/h | W |
| NW 607 AS | Air | 230/50/1 | 280 | 270 | 210 | 10.6 | 22.2 | 13.9 | 1050 |
| NW H 607 AS | Air | 230/50/1 | 280 | 270 | 210 | 10.6 | 22.2 | 13.9 | 1050 |
| NW L 607 AS | Air | 230/50/1 | 280 | 270 | 190 | 11.0 | 20.9 | 13.6 | 1050 |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions